



Ref: AMP/ENGG/MULTAN/2023  
September 22<sup>nd</sup>, 2023

**TENDER NOTICE**

**CONSTRUCTION OF PAVED WAY FOR ENGINEERING AT MULTAN  
INTERNATIONAL AIRPORT**

Sealed un-conditional tenders are invited from reputed Engineering firms registered with Pakistan Engineering Council in C-6 category and from PIA 'B' class approved enlisted Civil contractors for the subject work. Tender should be addressed to General Manager (Facilities Management) and dropped in Manager Finance Works office (2<sup>nd</sup> floor PIA Head Office Building Karachi) by October 11, 2023 till 15:00 hrs and will be opened on the same day at 15:30 hrs in the office of General Manager Facilities Management. All details regarding the tender can be downloaded from [www.piac.com.pk](http://www.piac.com.pk) and [www.ppra.org.pk](http://www.ppra.org.pk).  
PKR 35,000 Earnest money (refundable) should be attached with the tender.

On the face of envelop reference must be written AMP/ENGG/MULTAN/2023.

**GENERAL MANAGER  
(FACILITIES MANAGEMENT DIVISION)**  
1<sup>ST</sup> FLOOR, FLIGHT OPERATION BUILDING  
PIA HEAD OFFICE.  
Tel: 021-9904640  
Email: [gm.facilitiesmanagement@piac.aero](mailto:gm.facilitiesmanagement@piac.aero)

COPY TO:

1. FINANCE MANGER(W&P)
2. NOTICE BOARD



**TENDER FORM**

Ref: AMP/ENGG/MULTAN/2023  
September 22<sup>nd</sup>, 2023

M/s \_\_\_\_\_

DESCRIPTION OF WORK: -

**CONSTRUCTION OF PAVED WAY FOR ENGINEERING AT MULTAN  
INTERNATIONAL AIRPORT**

Dear Sir,

Please send not later than 11-10-2023 your sealed tenders for the items mentioned in the attached sheet as per following terms and condition.

1. PIA reserves the right to accept or reject any quotations without assigning any reason as per PPRA rules.
2. An earnest-money of **PKR 35,000** in the shape of pay-order/Bank Draft in favor of PIA is to be attached with quotation as earnest money.
3. Tender will be opened by on 11-10-2023 at **15:30** Hours by the under signed in presence of the contractors who care to attend.
4. Your quotation should remain valid up to **Three Months**.
5. Period required for completion of project is **One month**.
6. All works/sample/design will be executed / approved by the engineer on duty.
7. PIA reserves the right to cancel the work order at any stage of the work without assigning any reason as per PPRA RULE # 33.
8. PIA accepts only standard materials of original manufacturer strictly in accordance with the specifications. Any inferior or sub-standard materials, if used, shall be rejected out-rightly and registration of the contractor concerned may be cancelled.

Seal & Signature  
Of the contractor

For: **Pakistan International Airlines**



9. PIA shall have the option to increase or decrease the quantity of any item mentioned in the quotation / work order.
10. The firm to whom the contract is awarded shall have to abide by the rules and regulations mentioned in the work order and as well as the all rules & regulations of PIA, PEC and PPRA.
11. No excuse of non – availability of materials of fluctuation in the market rates etc. shall be accepted after the work order is issued.
12. Security deposit of 10% will be deducted from each bill and same will be returned after six months. In case of any discrepancy found, the same will be withheld without prior notification.
13. If the work is delayed after given time period, Rs. 2000 / day will be deducted, up to max. 10% of total project cost.
14. The attached Performa of permit to work is mandatory job to be followed at the time of award of work. Annexure 'A'

Seal & Signature  
Of the contractor

For: **Pakistan International Airlines**



Ref: AMP/ENGG/MULTAN/2023  
September 22<sup>nd</sup>, 2023

M/s \_\_\_\_\_

**CONSTRUCTION OF PAVED WAY FOR ENGINEERING AT MULTAN  
INTERNATIONAL AIRPORT**

**BOQ**

SR. NO.	DESCRIPTION	UNIT	QTY.	RATE	AMOUNT
1	Providing and laying, <b>PCC interlocking Paving</b> stone, 60 mm thick in natural colour, as in floors, drive-way, walk-way etc., any pattern and any shape, (Hydraulically compressed), laid and jointed in sand, including 50mm thick bed of stone dust (KHAKA) cushion as laying course, all as specified.	Sqm	239.23		
2	Providing & fixing <b>Precast Edge Block</b> 3750psi Industrial make size 6" thick x 18" high including cost of cartage, excavation, formwork, hunching with 2250 psi lean concrete jointed with 1:4 cement sand mortar as directed by the Engineer.	Rft	300.0		

For: **Pakistan International Airlines**

Seal & Signature  
Of the contractor




3	Preparation of subgrade i/c scrapping of existing surface upto 6" depth and compacting the earth, the cost of all labor, T&P Complete as directed by the Engineer.	Sft	2575.0		
4	Providing and laying <b>stone soling</b> under floors comprising of broken stone ballast 3" size including filling the voids with sprawls and stone dust including the cost of compacting, provision of all labor, material T&P complete as per all respects and as directed by Engineer.	Cft	772.5		
				<b>Total Rs.</b>	

- Must be inclusive of all taxes.
- All contractors are advised to ensure prior visit of site before submitting the tender, for assessment of job, but not mandatory.
- The amount quoted should include transportation charges if applicable.

Seal & Signature  
Of the contractor

For: **Pakistan International Airlines**

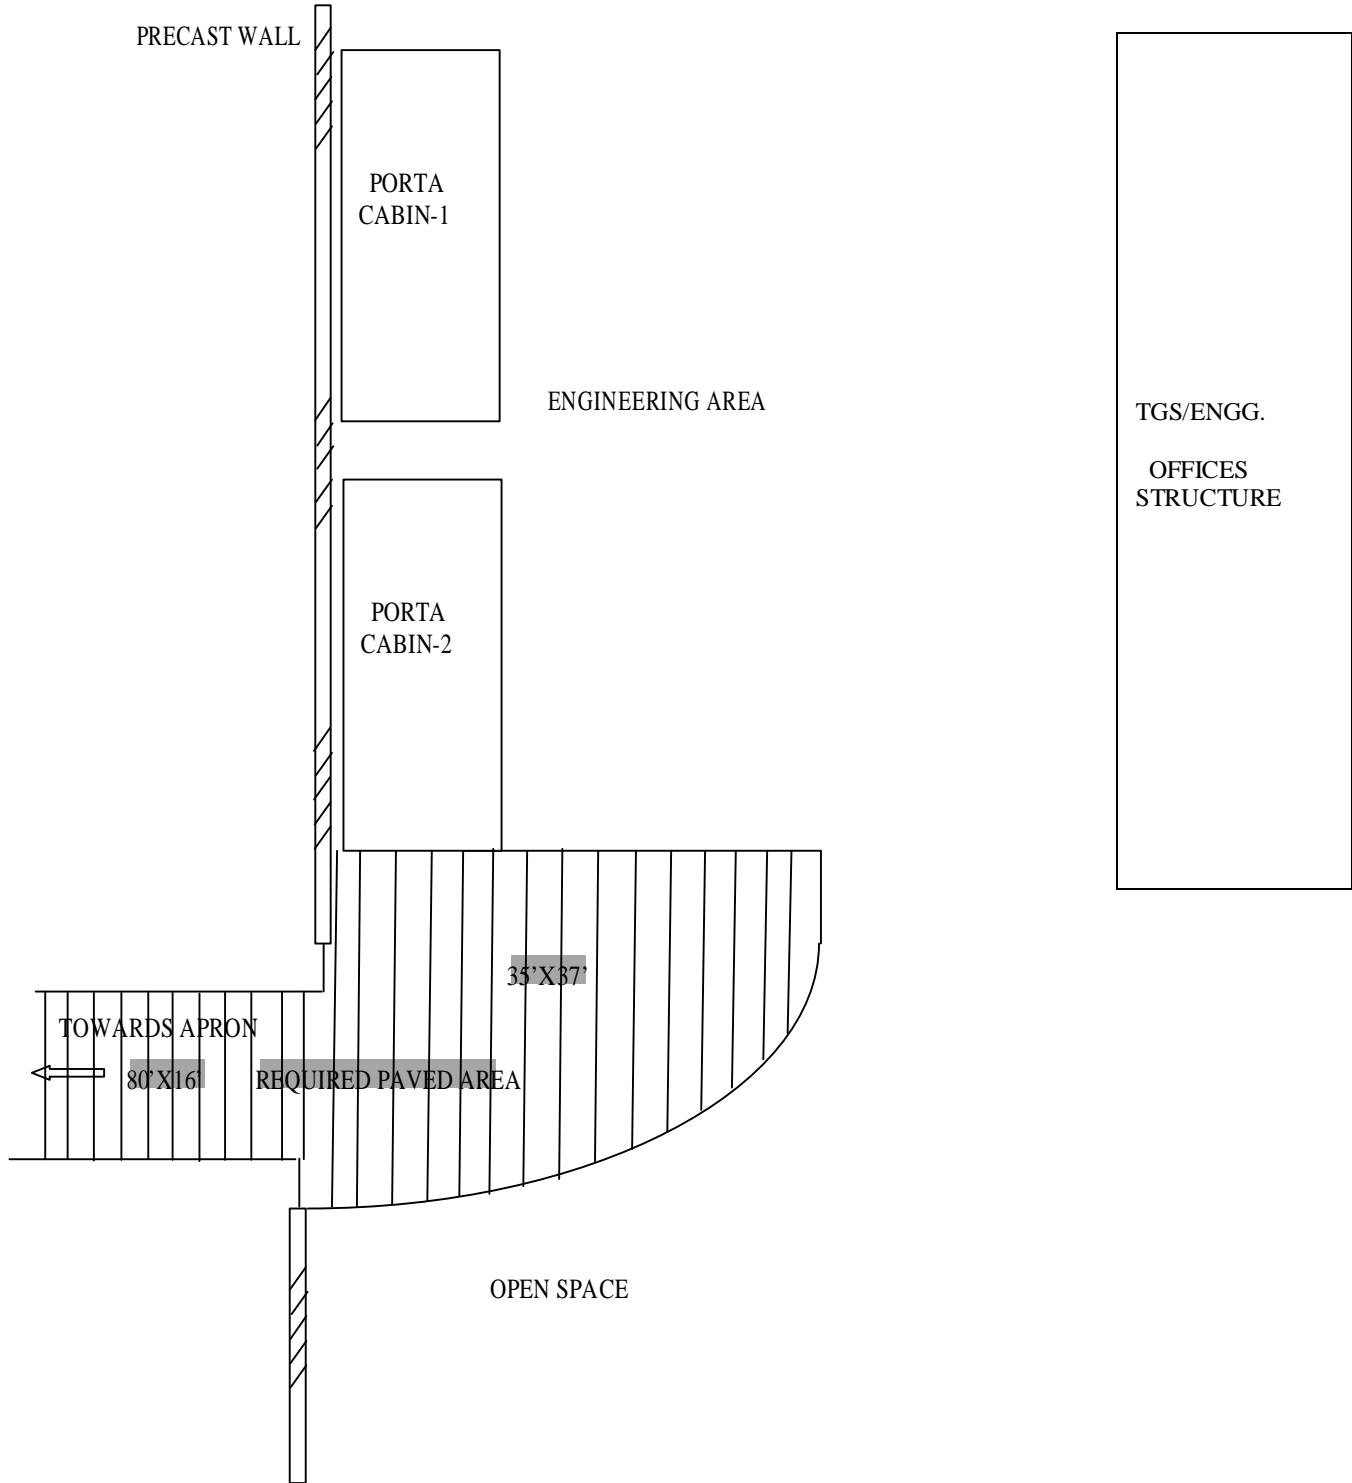

Seal & Signature  
Of the contractor

For: **Pakistan International Airlines**